

# L-RD 250K-FA

Pressed steel swivel caster, medium duty design, with top plate fitting, wheel with "Blickle Comfort" two-component solid rubber tires, with pressed steel rim, with steel thread guard

EAN 4047526107161  
 ID 12229  
 Customs tariff number 87169090



**rig:** L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

**Wheel:** RD series

- tire: two-component solid rubber "Blickle Comfort", hardness 65 Shore A, color black
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

**Other features:**

- chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +80 °C, reduced load capacity over +60 °C
- Bolted version

**Technical data:**

Wheel Ø (D)	☉	250 mm
Wheel width	⊥	60 mm
Load capacity at 4 km/h	⊞	450 kg
Load capacity (static)	⊞	1,125 kg
Bearing type	⊙	ball bearing
Total height (H)	⌀	295 mm
Plate size	⊞	175 x 175 mm
Bolt hole spacing	⊞	140 x 140 mm
Bolt hole Ø	⌀	15 mm
Offset (F)	⊞	70 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		65 Shore A
Unit weight	⊞	7.3 kg
Non-marking		×
Non-staining		×
Antistatic	⊞	×
Electrically conductive	⊞	×
Corrosion-resistant		×
Heat-resistant	⊞	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×





**Tread and tyre hardness**  
 ■■■□□□ 65 Shore A

**Rolling resistance**  
 ■■■□□□ good

**Wear resistance**  
 ■■■□□□ satisfactory

**Operating noise / floor surface preservation**  
 ■■■□□□ very good

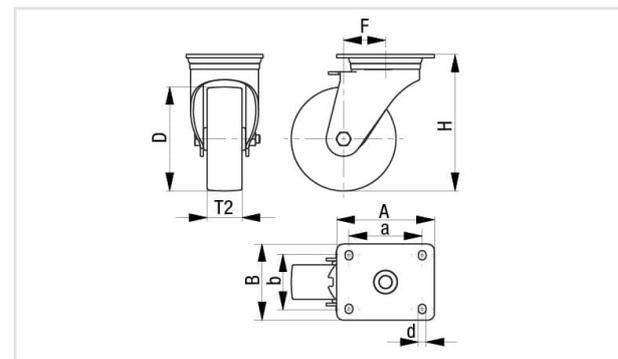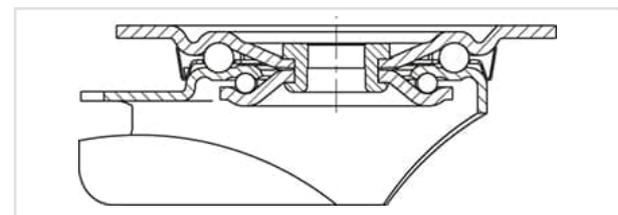

## Product references



**Corresponding standard locking L-RD 250K-ST-FA**



**Corresponding rigid caster B-RD 250K-FA**



**Wheel used RD 250/25K**