

## LRA-POA 75G-FI-GS10

Light duty swivel caster, with bolt hole fitting, with threaded pin, with brake system 'stop-fix', nylon wheel

EAN 4047526313074

ID 313072

Customs tariff number 83022000



### rig: LRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: POA series

- high-quality nylon 6, impact resistant, hardness 70 Shore D, color black

### Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -25 °C to +80 °C, reduced load capacity over +35 °C

### Technical data:

|                              |   |            |
|------------------------------|---|------------|
| Wheel Ø (D)                  | ☉ | 75 mm      |
| Wheel width                  | ⊥ | 23 mm      |
| Load capacity at 3 km/h      | ⊞ | 75 kg      |
| Load capacity (static)       | ⊞ | 190 kg     |
| Bearing type                 | ☉ | plain bore |
| Total height (H)             | ⌀ | 98 mm      |
| Pin length                   | ⊥ | 30 mm      |
| Thread                       |   | M10        |
| Offset (F)                   | ⌀ | 28 mm      |
| Temperature resistance min   |   | -25 °C     |
| Temperature resistance max   |   | 80 °C      |
| Tread and tyre hardness      |   | 70 Shore D |
| Unit weight                  | ⚖ | 0.2 kg     |
| Non-marking                  |   | ✓          |
| Non-staining                 |   | ✓          |
| Antistatic                   | ⚡ | ✗          |
| Electrically conductive      | ⚡ | ✗          |
| Corrosion-resistant          |   | ✗          |
| Heat-resistant               | 🔥 | ✗          |
| Tread hydrolysis-resistant   |   | ✗          |
| Suitable for autoclaves      |   | ✗          |
| Suitable for machine washing |   | ✗          |



### Tread and tyre hardness

70 Shore D

### Rolling resistance



excellent

### Wear resistance

good

### Operating noise / floor surface preservation

satisfactory

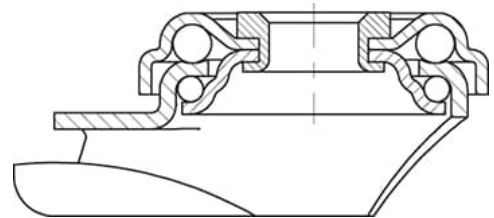

## Product references



**Wheel used POA 75/8G**