

## L-VPP 200G-ST

Pressed steel swivel caster, medium duty design, with top plate fitting, with brake system 'stop-top', wheel with standard solid rubber tire, with synthetic rim

EAN 4047526035594

ID 35592

Customs tariff number 87169090



### rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: VPP series

- tire: standard solid rubber, hardness 80 Shore A, color black
- rim: high-quality polypropylene, impact resistant, color black

### Other features:

- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

### Technical data:

Wheel Ø (D)	☞	200 mm
Wheel width	⊥	50 mm
Load capacity at 4 km/h	⚖	205 kg
Load capacity (static)	⚖	515 kg
Bearing type	⊙	plain bore
Total height (H)	⊘	235 mm
Plate size	📏	140 x 110 mm
Bolt hole spacing	📏	105 x 75–80 mm
Bolt hole Ø	🔧	11 mm
Offset (F)	⊘	63 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		80 Shore A
Unit weight	⚖	3.4 kg
Non-marking	✗	
Non-staining	✗	
Antistatic	🔧 ✗	
Electrically conductive	🔧 ✗	
Corrosion-resistant	✗	
Heat-resistant	🔥 ✗	
Tread hydrolysis-resistant	✗	
Suitable for autoclaves	✗	
Suitable for machine washing	✗	



### Tread and tyre hardness

■ ■ ■ ■ □ 80 Shore A

### Rolling resistance



■ ■ □ □ □ satisfactory

### Wear resistance

■ □ □ □ □ sufficient

### Operating noise / floor surface preservation

■ ■ ■ ■ □ very good

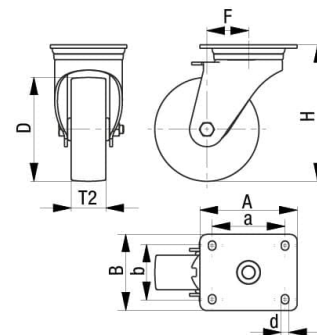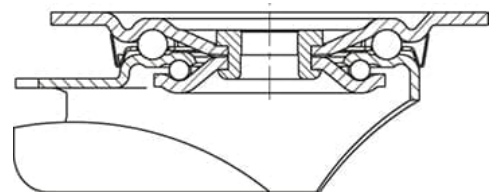

## Product references



**Corresponding rigid caster B-VPP 200G**



**Corresponding swivel caster L-VPP 200G**



**Wheel used VPP 200/20G**