

L-P 265R

Pressed steel swivel caster, medium duty design, with top plate fitting, wheel with pneumatic tire, with pressed steel rim

EAN 4047526040499

ID 40493

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process















Wheel: P series

- tire: pneumatic tire with ribbed profile, hardness 60 Shore A, color black, 4-ply rating
- rim: pressed steel, with welded tubular steel hub, zinc-plated, blue-passivated, Cr6-free
- swivel casters with brakes lose brake force if the tire pressure is too low

Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -25 °C to +50 °C
- the wheel and tire dimensions provided here apply to new tires that are not bearing a load. Their width and diameter may change when they are in use.
- speeds up to 16 km/h possible for wheels with ball bearing and reduced load capacity

Technical data:

Wheel Ø (D)		260 mm
Wheel width		85 mm
Load capacity at 4 km/h		250 kg
Load capacity (static)		250 kg
Bearing type		roller bearing
Profile		ribbed profile
Total height (H)		308 mm
Plate size		175 x 175 mm
Bolt hole spacing		140 x 140 mm
Bolt hole Ø		15 mm
Offset (F)		78 mm
Temperature resistance min		-25 °C
Temperature resistance max		50 °C
Tread and tyre hardness		60 Shore A
Unit weight		5.2 kg
Non-marking		×
Non-staining		×
Antistatic		×
Electrically conductive		×
Corrosion-resistant		×



Tread and tyre hardness

 60 Shore A

Rolling resistance


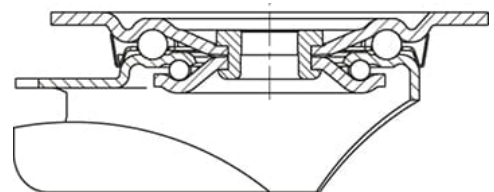
 good

Wear resistance

 satisfactory

Operating noise / floor surface preservation

 excellent



Heat-resistant	✗
Tread hydrolysis-resistant	✗
Suitable for autoclaves	✗
Suitable for machine washing	✗

Product references



Corresponding standard locking L-P 265R-ST



Corresponding rigid caster B-P 265R



Wheel used P 265/20-75R