

L-RD 125R-FA

Pressed steel swivel caster, medium duty design, with top plate fitting, wheel with "Blickle Comfort" two-component solid rubber tires, with pressed steel rim, with steel thread guard

EAN 4047526053819

ID 53819

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: RD series

- tire: two-component solid rubber "Blickle Comfort", hardness 65 Shore A, color black
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -25 °C to +80 °C, reduced load capacity over +60 °C

Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	37.5 mm
Load capacity at 4 km/h	⬆	120 kg
Load capacity (static)	⬆	300 kg
Bearing type	⦿	roller bearing
Total height (H)	⊕	150 mm
Plate size	⊠	100 x 85 mm
Bolt hole spacing	⊠	80 x 60 mm
Bolt hole Ø	⌀	9 mm
Offset (F)	⦿	38 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		65 Shore A
Unit weight	⚖	1.2 kg
Non-marking		×
Non-staining		×
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×



Tread and tyre hardness

■■■■■ 65 Shore A

Rolling resistance



■■■■■ good

Wear resistance

■■■■■ satisfactory

Operating noise / floor surface preservation

■■■■■ very good

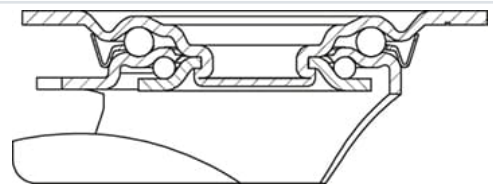

Product references



Corresponding standard locking L-RD 125R-FI-FA



Corresponding rigid caster B-RD 125R-FA



Wheel used RD 125/15R