

## L-VW 125R-ST

**Pressed steel swivel caster, medium duty design, with top plate fitting, with brake system 'stop-top', wheel with "Blickle Soft" soft rubber tire, with pressed steel rim**

**EAN** 4047526561802

**ID** 561803

**Customs tariff number** 87169090



### rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: VW series

- tire: soft rubber "Blickle Soft", hardness 50 Shore A, color black (wheel Ø 260 mm with additional hard rubber core)
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

### Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -25 °C to +80 °C, reduced load capacity over +60 °C
- puncture-proof alternatives for pneumatic tires

### Technical data:

Wheel Ø (D)	⌀	125 mm
Wheel width	⊥	37.5 mm
Load capacity at 4 km/h	⬆	50 kg
Load capacity (static)	⬆	125 kg
Bearing type	⊙	roller bearing
Profile		round profile
Total height (H)	⊘	150 mm
Plate size	⊞	100 x 85 mm
Bolt hole spacing	⊞	80 x 60 mm
Bolt hole Ø	⌀	9 mm
Offset (F)	⊞	38 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		50 Shore A
Unit weight	⬆	1.3 kg
Non-marking	×	
Non-staining	×	
Antistatic	⊞	×
Electrically conductive	⊞	×
Corrosion-resistant	×	
Heat-resistant	⊞	×
Tread hydrolysis-resistant	×	



### Tread and tyre hardness

50 Shore A

### Rolling resistance



good

### Wear resistance

satisfactory

### Operating noise / floor surface preservation

excellent

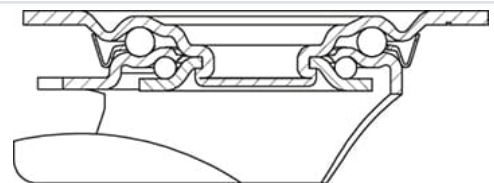

Suitable for autoclaves	×
Suitable for machine washing	×

Product references

