

L-VW 202R

Pressed steel swivel caster, medium duty design, with top plate fitting, wheel with "Blickle Soft" soft rubber tire, with pressed steel rim

EAN 4047526566715

ID 566711

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: VW series

- tire: soft rubber "Blickle Soft", hardness 50 Shore A, color black (wheel Ø 260 mm with additional hard rubber core)
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -25 °C to +80 °C, reduced load capacity over +60 °C
- puncture-proof alternatives for pneumatic tires

Technical data:

Wheel Ø (D)	☉	200 mm
Wheel width	⊥	50 mm
Load capacity at 4 km/h	⚖	100 kg
Load capacity (static)	⚖	250 kg
Bearing type	⦿	roller bearing
Profile		round profile
Total height (H)	⌀	235 mm
Plate size	☐	140 x 110 mm
Bolt hole spacing	⌘	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⌀	65 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		50 Shore A
Unit weight	⚖	3.3 kg
Non-marking	✗	
Non-staining	✗	
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗



Tread and tyre hardness

50 Shore A

Rolling resistance



good

Wear resistance

satisfactory

Operating noise / floor surface preservation

excellent

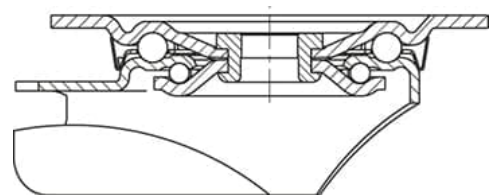

Product references



Corresponding standard locking L-VW 202R-FI



Corresponding rigid caster B-VW 202R



Wheel used VW 202/20R