

LH-ALST 100K-1-FI

Pressed steel swivel caster, heavy duty design, with top plate fitting, with brake system 'stop-fix', heavy duty wheel with Blickle Softhane® polyurethane tread, with aluminum wheel center

EAN 4047526606015
 ID 606012
 Customs tariff number 87169090



rig: LH series

- strong pressed steel, zinc-plated, blue-passivated, Cr6-free
- heavy fork and top plate
- double ball bearing in the swivel head
- bolted and secured central kingpin, extremely strong
- particularly resistant to shocks and impact due to **four specially-shaped, hardened bearing seats**

Wheel: ALST series

- tread: high-quality polyurethane elastomer Blickle Softhane®, hardness 75 Shore A, color green, non-marking, non-staining
- wheel center: die-cast aluminium, color silver gray



Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -5 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +105 °F

Technical data:



Wheel Ø (D)	⊕	100 mm
Wheel width	⊥	40 mm
Load capacity at 4 km/h	⊞	320 kg
Load capacity (static)	⊞	800 kg
Bearing type	⊙	ball bearing
Total height (H)	⊕	140 mm
Plate size	⊞	100 x 85 mm
Bolt hole spacing	⊞	80 x 60 mm
Bolt hole Ø	⊕	9 mm
Offset (F)	⊕	45 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		75 Shore A
Unit weight	⊞	2.1 kg
Non-marking		✓
Non-staining		✓
Antistatic	⊞	✗
Electrically conductive	⊞	✗
Corrosion-resistant		✗
Heat-resistant	⊞	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗

Tread and tyre hardness
 ■■■■□□ 75 Shore A

Rolling resistance
 ■■■■□ very good

Wear resistance
 ■■■■□ very good

Operating noise / floor surface preservation
 ■■■■□ very good

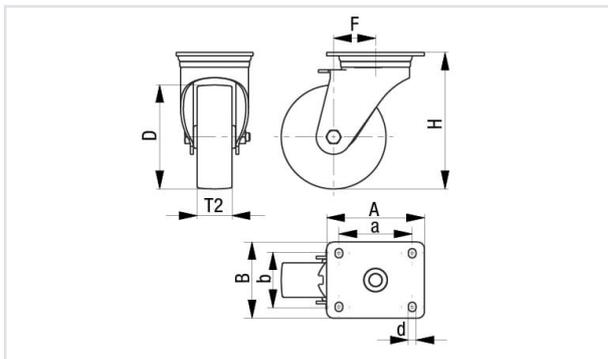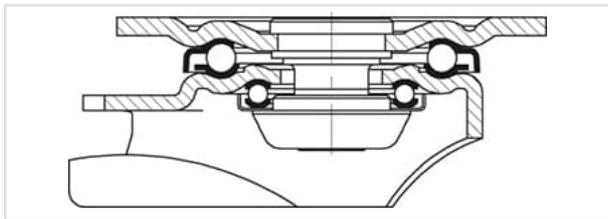

Product references



Corresponding rigid caster BH-ALST 100K-1



Corresponding swivel caster LH-ALST 100K-1



Wheel used ALST 100/15K