

LE-PO 200R-FI-FA

Pressed steel swivel caster, with top plate fitting, with brake system 'stop-fix', nylon wheel, with steel thread guard

EAN 4047526606268

ID 606269

Customs tariff number 87169090



rig: LE series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PO series

- high-quality nylon 6, impact resistant, hardness 70 Shore D, color natural white

Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -25 °C to +80 °C, reduced load capacity over +35 °C

Technical data:

Wheel Ø (D)		200 mm
Wheel width		50 mm
Load capacity at 4 km/h		300 kg
Load capacity (static)		750 kg
Bearing type		roller bearing
Total height (H)		235 mm
Plate size		140 x 110 mm
Bolt hole spacing		105 x 75–80 mm
Bolt hole Ø		11 mm
Offset (F)		46 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		70 Shore D
Unit weight		3 kg
Non-marking		✓
Non-staining		✓
Antistatic		✗
Electrically conductive		✗
Corrosion-resistant		✗
Heat-resistant		✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tyre hardness

 70 Shore D

Rolling resistance



 excellent

Wear resistance

 good

Operating noise / floor surface preservation

 satisfactory

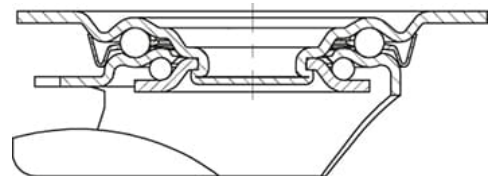

Product references



Corresponding rigid caster B-PO 200R-FA



Corresponding swivel caster LE-PO 200R-FA



Wheel used PO 200/20R