

## LK-SE 200K-FI

**Pressed steel swivel caster, heavy duty design, with brake system 'stop-fix', heavy duty wheel, with 'Blickle EasyRoll' elastic solid rubber tires, with steel wheel center**

**EAN** 4047526621407

**ID** 621409

**Customs tariff number** 87169090



**rig:** LK series

- strong pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 125x50 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

**Wheel:** SE series

- tire: high-quality elastic solid rubber "Blickle EasyRoll" in smooth rolling quality, hardness 65 Shore A, color black
- wheel center: thick-walled pressed steel, with tubular steel hub, lacquered, color anthracite

**Other features:**

- chemical resistance to many aggressive substances, except oils
- operating temperature: -5 °F to +175 °F, temporarily up to +210 °F, reduced load capacity over +140 °F

**Technical data:**

Wheel Ø (D)	☉	200 mm
Wheel width	⊥	50 mm
Load capacity at 4 km/h	⚖	600 kg
Load capacity (static)	⚖	1,500 kg
Bearing type	⊙	ball bearing
Total height (H)	⊕	245 mm
Plate size	📏	140 x 110 mm
Bolt hole spacing	📏	105 x 75–80 mm
Bolt hole Ø	🔧	11 mm
Offset (F)	📏	59 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		65 Shore A
Unit weight	⚖	4.5 kg
Non-marking		×
Non-staining		×
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×



**Tread and tyre hardness**

■ ■ ■ ■ ■ 65 Shore A

**Rolling resistance**



■ ■ ■ ■ ■ very good

**Wear resistance**

■ ■ ■ ■ ■ good

**Operating noise / floor surface preservation**

■ ■ ■ ■ ■ very good

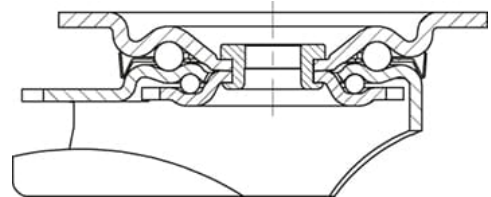

## Product references



**Corresponding rigid caster BH-SE 200K**



**Corresponding swivel caster LK-SE 200K**



**Wheel used SE 200/20K**