

## LWK-TPA 101G-FI-GS10

**Blickle synthetic swivel caster WAVE, color gray white, with threaded pin, with brake system 'stop-fix', wheel with thermoplastic rubber tread, with polypropylene wheel center**

**EAN** 4047526060015

**ID** 744783

**Customs tariff number** 87169090



### rig: LWK series

- high-quality nylon 6, impact resistant
- encapsulated, double-sealed, grooved ball bearing in the swivel head
- bolt hole
- color gray white RAL 9002
- modern, appealing design

### Wheel: TPA series

- tread: high-quality thermoplastic rubber-elastomer (TPE), hardness 85 Shore A, color gray, non-marking, oil containing
- wheel center: high-quality polypropylene, impact resistant, color gray white RAL 9002

### Other features:

- very high chemical resistance to many aggressive substances
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C
- tread contains oil, may stain sensitive surfaces

### Technical data:

Wheel Ø (D)	☉	100 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⬆	100 kg
Load capacity (static)	⬆	250 kg
Bearing type	☉	plain bore
Total height (H)	⊕	135 mm
Pin length	⊥	20 mm
Thread		M10
Offset (F)	⊕	38 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		85 Shore A
Unit weight	⚖	0.5 kg
Non-marking		✓
Non-staining		✗
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



### Tread and tyre hardness

■ ■ ■ ■ □ □ 85 Shore A

### Rolling resistance


■ ■ ■ ■ □ very good


### Wear resistance

■ ■ □ □ □ satisfactory

### Operating noise / floor surface preservation

■ ■ ■ □ □ good

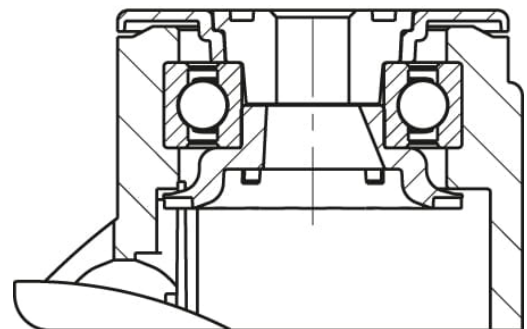

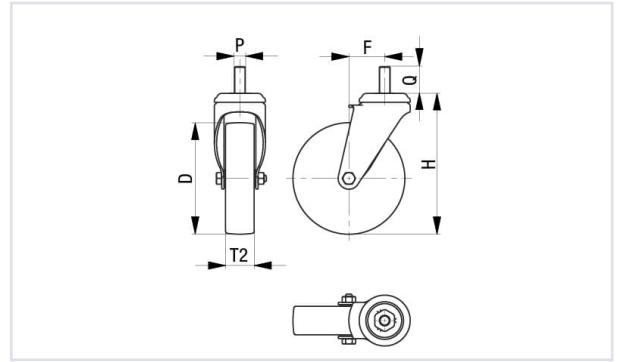

## Product references

