

LE-VPP 80R-FI-SG-FA

Pressed steel swivel caster, with top plate fitting, with brake system 'stop-fix', wheel with standard solid rubber tire, with synthetic rim, non-marking, gray, with steel thread guard

EAN 4047526016531

ID 749747

Customs tariff number 83022000



rig: LE series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process















Wheel: VPP series

- tire: standard solid rubber, hardness 80 Shore A, color gray, non-marking
- rim: high-quality polypropylene, impact resistant, color black

Other features:

- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

Technical data:

Wheel Ø (D)		80 mm
Wheel width		25 mm
Load capacity at 4 km/h		50 kg
Load capacity (static)		125 kg
Bearing type		roller bearing
Total height (H)		102 mm
Plate size		100 x 85 mm
Bolt hole spacing		80 x 60 mm
Bolt hole Ø		9 mm
Offset (F)		39 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		80 Shore A
Unit weight		0.7 kg
Non-marking		✓
Non-staining		✓
Antistatic		✗
Electrically conductive		✗
Corrosion-resistant		✗
Heat-resistant		✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tyre hardness

 80 Shore A

Rolling resistance



 satisfactory

Wear resistance

 sufficient

Operating noise / floor surface preservation

 very good

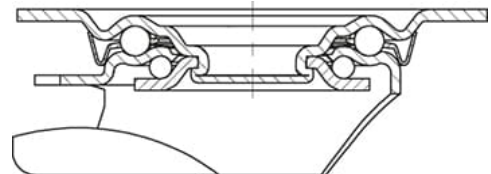

Product references



Corresponding rigid caster B-VPP 80R-SG-FA



Corresponding swivel caster LE-VPP 80R-SG-FA



Wheel used VPP 80/12R-SG