

LER-PO 125KA-FI-FA

Pressed steel swivel caster, with bolt hole fitting, with brake system 'stop-fix', nylon wheel, with synthetic thread guard, small, with steel thread guard

EAN 4047526016968

ID 749756

Customs tariff number 87169090



rig: LER series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PO series

- high-quality nylon 6, impact resistant, hardness 70 Shore D, color natural white

Other features:

- with synthetic thread guard, small
- high chemical resistance to many aggressive substances
- operating temperature: -20 °C to +80 °C, reduced load capacity over +35 °C

Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	40 mm
Load capacity at 4 km/h	⬆	150 kg
Load capacity (static)	⬆	375 kg
Bearing type	☉	ball bearing (C)
Total height (H)	⌀	150 mm
Plate Ø	⌀	70 mm
Bolt hole	🔩	13 mm
Offset (F)	⌀	40 mm
Temperature resistance min		-25 °C
Temperature resistance max		80 °C
Tread and tyre hardness		70 Shore D
Unit weight	⚖	1 kg
Non-marking	✓	
Non-staining	✓	
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



Tread and tyre hardness

70 Shore D

Rolling resistance



excellent

Wear resistance

good

Operating noise / floor surface preservation

satisfactory

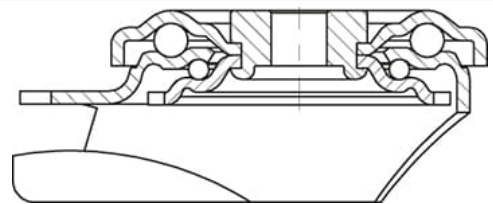

Product references



Corresponding swivel caster LER-PO 125KA-FA



Wheel used PO 125/8KA