

LRA-VPA 75K-FI-EL-E05

Light duty swivel caster, with bolt hole fitting, with metal expander, with brake system 'stop-fix', wheel with solid rubber tires, with synthetic rim, electrically conductive

EAN 4047526045500 **ID** 751167 **Customs tariff number** 83022000



rig: LRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- · double ball bearing in the swivel head
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: VPA series

- tire: high-quality solid rubber, hardness 80 Shore A, color black
- rim: high-quality polypropylene, impact resistant, color black, Electrically conductive, color black, marking


Other features:


- high chemical resistance to many aggressive substances, except oils
 operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C
- electrical conductivity (ohmic resistance) $\leq 10^4 \Omega$


Technical data:

Wheel Ø (D)	0	75 mm
Wheel width	,O,	25 mm
Load capacity at 3 km/h	පි	45 kg
Load capacity (static)	පි	115 kg
Bearing type	•	ball bearing
Total height (H)	Ø,	101 mm
Internal tube dimension	•	35–40 mm
Product Detail. Technical Data. Inner Pipe Dimension Square Tube		29–32 mm
Offset (F)	₫	28 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		80 Shore A
Unit weight	6	0.5 kg
Non-marking		×
Non-staining		×
Antistatic	4	×
Electrically conductive	<u>(4)</u>	✓
Corrosion-resistant		×
Heat-resistant	F	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×










19.05.2024 | www.blickle.ca 1/2

Product references





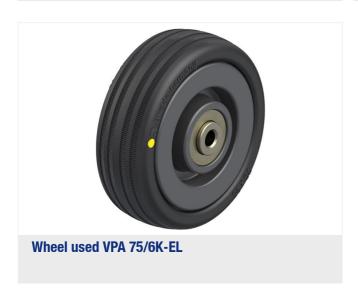

19.05.2024 | www.blickle.ca 2/2