

LKX-SPO 125XK-3-FI

Stainless steel heavy duty swivel caster with top plate fitting, with brake system 'stop-fix', nylon heavy duty wheel

EAN 4047526085476

ID 754916

Customs tariff number 87169090



rig: LKX series

- high-quality chromium-nickel steel (1.4301/AISI 304), stainless steel, vibration-ground finishing
- all parts including axle material are corrosion-resistant
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 125x50 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: SPO series

- high-quality nylon 6, impact resistant, hardness 70 Shore D, extremely robust heavy-duty version, color natural white

Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -20 °C to +80 °C, reduced load capacity over +35 °C

Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	40 mm
Load capacity at 4 km/h	⚖	350 kg
Load capacity (static)	⚖	875 kg
Bearing type	⊙	ball bearing
Total height (H)	⌀	155 mm
Plate size	☐	140 x 110 mm
Bolt hole spacing	⌓	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⌒	42 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		70 Shore D
Unit weight	⚖	1.7 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✓
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tyre hardness

★★★★★ 70 Shore D

Rolling resistance



★★★★★ excellent

Wear resistance

★★★★☆ good

Operating noise / floor surface preservation

★★★★☆ satisfactory

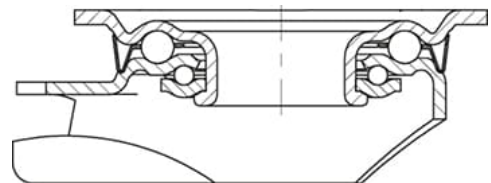

Product references



Corresponding rigid caster BKX-SP0 125XK-3



Corresponding swivel caster LKX-SP0 125XK-3