

L-PPN 150G-FI

Pressed steel swivel caster, medium duty design, with top plate fitting, with brake system 'stop-fix', polypropylene wheel

EAN 4047526098698

ID 762806

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PPN series

- high-quality polypropylene, impact resistant, hardness 60 Shore D, color natural white

Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

Technical data:

Wheel Ø (D)	☉	150 mm
Wheel width	⏏	50 mm
Load capacity at 4 km/h	⚖	300 kg
Load capacity (static)	⚖	750 kg
Bearing type	☉	plain bore
Total height (H)	⌀	190 mm
Plate size	📏	140 x 110 mm
Bolt hole spacing	📏	105 x 75–80 mm
Bolt hole Ø	🔩	11 mm
Offset (F)	📏	62 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		60 Shore D
Unit weight	⚖	2.3 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tyre hardness

■■■■■ 60 Shore D

Rolling resistance



■■■■■ very good

Wear resistance

■■■■■ satisfactory

Operating noise / floor surface preservation

■■■■■ satisfactory

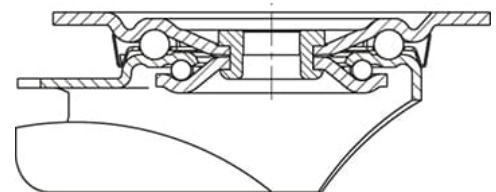

Product references



Corresponding rigid caster B-PPN 150G



Corresponding swivel caster L-PPN 150G



Wheel used PPN 150/20G