

## LPA-PATH 50G

Light duty swivel castor, with top plate fitting Wheel, with thermoplastic polyurethane tread, with nylon wheel centre

EAN 4047526105884

ID 846965

Customs tariff number 83022000



### rig: LPA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

### Other features:

- very high chemical resistance to many aggressive substances
- operating temperature: -15 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F

### Technical data:

Wheel Ø (D)	⌀	50 mm
Wheel width	⊥	19 mm
Load capacity at 3 km/h	⬇	75 kg
Load capacity (static)	⬇	190 kg
Bearing type	⊙	plain bore
Total height (H)	⊕	71 mm
Plate size	⊞	60 x 60 mm
Bolt hole spacing	⊞	38 x 38 / 48 x 48 mm
Bolt hole Ø	⌀	6.2 mm
Offset (F)	⊕	23 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		94 Shore A
Unit weight	⚖	0.2 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



### Tread and tyre hardness

■ ■ ■ ■ ■ 94 Shore A

### Rolling resistance



■ ■ ■ ■ ■ very good

### Wear resistance

■ ■ ■ ■ ■ very good

### Operating noise / floor surface preservation

■ ■ ■ ■ ■ good

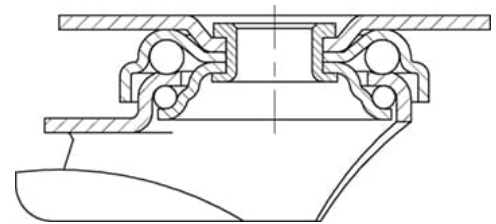

## Product references



**Corresponding standard locking LPA-PATH 5G-FI**



**Corresponding rigid caster BPA-PATH 5G**



**Wheel used PATH 50/8G**