

## L-PATH 200G

**Pressed steel swivel castor, medium duty design, with top plate fitting  
Wheel, with thermoplastic polyurethane tread, with nylon wheel centre**

EAN 4047526126674

ID 847022

Customs tariff number 87169090



### rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

### Other features:

- very high chemical resistance to many aggressive substances
- operating temperature: -15 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F

### Technical data:

Wheel Ø (D)	☉	200 mm
Wheel width	⊥	40 mm
Load capacity at 4 km/h	⬇	400 kg
Load capacity (static)	⬇	1,000 kg
Bearing type	☉	plain bore
Total height (H)	⌀	235 mm
Plate size	☐	140 x 110 mm
Bolt hole spacing	⊕	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⌀	65 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tyre hardness		94 Shore A
Unit weight	⚖	2.3 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



### Tread and tyre hardness

■ ■ ■ ■ ■ 94 Shore A

### Rolling resistance



■ ■ ■ ■ ■ very good

### Wear resistance

■ ■ ■ ■ ■ very good

### Operating noise / floor surface preservation

■ ■ ■ ■ ■ good

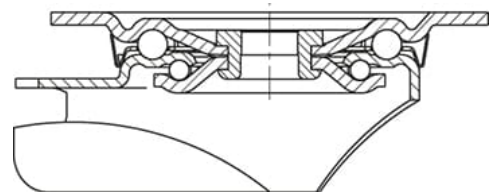

## Product references



**Corresponding standard locking L-PATH 200G-FI**



**Corresponding rigid caster B-PATH 200G**



**Wheel used PATH 200/20G**