

LRA-PATH 75KF-FI-EV02

Light duty swivel caster, with bolt hole fitting, with synthetic expander, with brake system 'stop-fix', wheel with thermoplastic polyurethane tread, with nylon wheel center, with synthetic thread guard, large

EAN 4047526139964

ID 848644

Customs tariff number 83022000



rig: LRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

Other features:

- with synthetic thread guard, large
- very high chemical resistance to many aggressive substances
- operating temperature: -5 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F

Technical data:

Wheel Ø (D)	⌀	75 mm
Wheel width	⊥	25 mm
Load capacity at 3 km/h	⬆	75 kg
Load capacity (static)	⬆	190 kg
Bearing type	⊙	ball bearing (C)
Total height (H)	⊕	101 mm
Internal tube dimension	⦶	18–21 mm
Offset (F)	⦶	28 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		94 Shore A
Unit weight	⚖	0.4 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tyre hardness

■ ■ ■ ■ ■ □ 94 Shore A

Rolling resistance



■ ■ ■ ■ ■ □ very good

Wear resistance

■ ■ ■ ■ ■ □ very good

Operating noise / floor surface preservation

■ ■ ■ ■ □ □ good

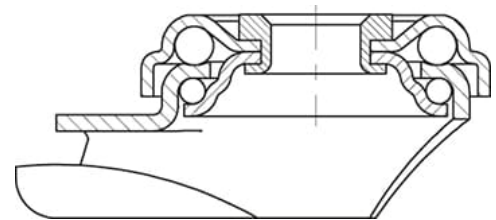

Product references



Corresponding rigid caster BRA-PATH 75KF



Corresponding swivel caster LRA-PATH 75KF-EV02



Wheel used PATH 75/6KF