

L-RD 200K-CS11-VLI-FA

Pressed steel swivel caster, medium duty design, with top plate fitting, with central brake system 'central-stop', wheel with "Blickle Comfort" two-component solid rubber tires, with pressed steel rim, non-marking, gray, with steel thread guard

EAN 4047526158828

ID 850001

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: RD series

- tire: two-component solid rubber "Blickle Comfort", hardness 56 Shore A, color gray
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +80 °C, reduced load capacity over +60 °C
- Bolted version

Technical data:

Wheel Ø (D)	☉	200 mm
Wheel width	⊥	50 mm
Load capacity at 4 km/h	⬇	350 kg
Load capacity (static)	⬇	875 kg
Bearing type	☉	ball bearing
Total height (H)	⌀	235 mm
Plate size	☐	140 x 110 mm
Bolt hole spacing	⊕	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⌀	63 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tyre hardness		56 Shore A
Unit weight	⚖	4 kg
Non-marking		✓
Non-staining		✓
Antistatic	☑	×
Electrically conductive	☑	×
Corrosion-resistant		×
Heat-resistant	☑	×
Tread hydrolysis-resistant		×



Tread and tyre hardness

■ ■ ■ ■ ■ 56 Shore A

Rolling resistance



■ ■ ■ ■ ■ good

Wear resistance

■ ■ ■ ■ ■ satisfactory

Operating noise / floor surface preservation

■ ■ ■ ■ ■ very good

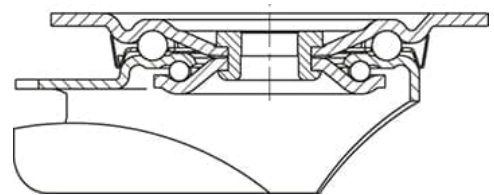

Suitable for autoclaves	×
Suitable for machine washing	×

Product references



Corresponding rigid caster B-RD 200K-VLI-FA



Corresponding swivel caster L-RD 200K-VLI-FA



Wheel used RD 200/20K-VLI