

## LKRXA-VPA 126G-11-FI-EXV18

**Stainless steel light duty swivel caster with bolt hole, with synthetic expander, with brake system 'stop-fix', wheel with solid rubber tires, with synthetic rim**

EAN 4047526346645

ID 916564

Customs tariff number 87169090



### rig: LKRXA series

- high-quality chromium-nickel steel (1.4301/AISI 304), stainless steel, vibration-ground finishing
- all parts including axle material are corrosion-resistant
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: VPA series

- tire: high-quality solid rubber, hardness 80 Shore A, color gray, non-marking, non-staining
- rim: high-quality nylon 6 or polypropylene in the electrically conductive version "-EL", impact resistant, color black

### Other features:

- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

### Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⬆	120 kg
Load capacity (static)	⬆	300 kg
Bearing type	☉	plain bore
Total height (H)	⌀	161 mm
Internal tube dimension	☞	36–41 mm
Offset (F)	⌀	40 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tyre hardness		80 Shore A
Unit weight	⚖	0.9 kg
Non-marking		✓
Non-staining		✓
Antistatic	☞	×
Electrically conductive	☞	×
Corrosion-resistant		✓
Heat-resistant	☞	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



### Tread and tyre hardness

■ ■ ■ ■ □ □ 80 Shore A

### Rolling resistance



■ ■ ■ ■ □ □ good

### Wear resistance

■ □ □ □ □ sufficient

### Operating noise / floor surface preservation

■ ■ ■ ■ □ very good

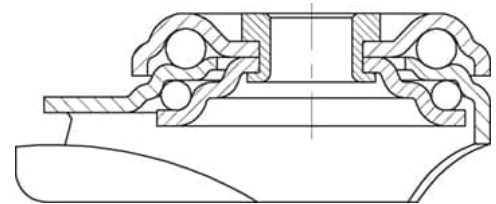

## Product references



**Corresponding swivel caster LKRXA-VPA 126G-11-EXV18**



**Wheel used VPA 126/12G**